

PRODUCT CARBON FOOTPRINT



GWP


This quantifies a product's contribution towards global warming. This is referred to as carbon footprint, global warming potential and also embodied carbon.

STANDARDS

These are ISO 14021 self-declared results, calculated according to ISO 14040 and ISO 14044 standards. The results follow ISO 21930/EN 15804+A2.

SCOPE OF ASSESSMENT

The results have a cradle-to-gate scope, comprising raw materials extraction and supply (A1), transport (A2) and manufacturing (A3).

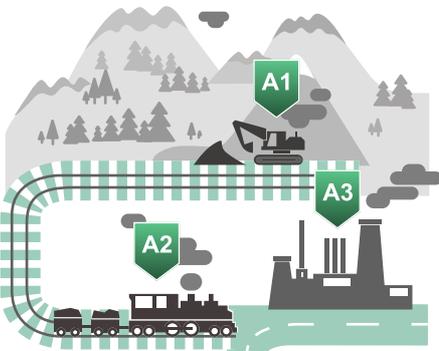

CARBON FOOTPRINT

Declared unit	1 metric ton
Mass of declared unit (kg)	1000
GWP-fossil, A1-A3 (kg CO₂e)	124,53
GWP-total, A1-A3 (kg CO₂e)	66,4

MANUFACTURER AND PRODUCT

Manufacturer	Finja Betong
Address	Betongvägen 1
Website	www.finja.se
Product name	Mur- & Putsbruk B ECO
Product reference	.
Place of production	Finja, Sweden
Period for data	2023

PRODUCT DESCRIPTION

General purpose masonry mortar for use in masonry walls, columns and partitions, inside and outside. Classification according to EN 998-2: Prescribed-G. Could be used for masonry works with bricks, light weight aggregate block and more. Please see product specific information on www.finja.se to choose the right mortar for the application.

SYSTEM BOUNDARY

Product stage			Construction		Use stage							End of life stage				Beyond the system boundary			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D	
X	X	X						Modules not declared											
Raw materials	Transport to site	Manufacturing	Transport	Construction	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy	Operational water	Deconstruction	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling	