

OSB for internal structural use in humid conditions.

CE


0765

inbottom	Texture Top	Texture Bottom
----------	-------------	----------------

DOP Ref. No. OSB3-CPR-2013 07-01 10
 0765-CPR-0778
 EN 13986:2004+A1:2015
 OSB 3 unsanded
 Reaction to fire: D-s2,d0
 Formaldehyde release: Class E1
 Release of PCP: <0,1 mg/kg

x1197

Product Certificates and DOP:
https://kronospan.com/lv_LV/express-services

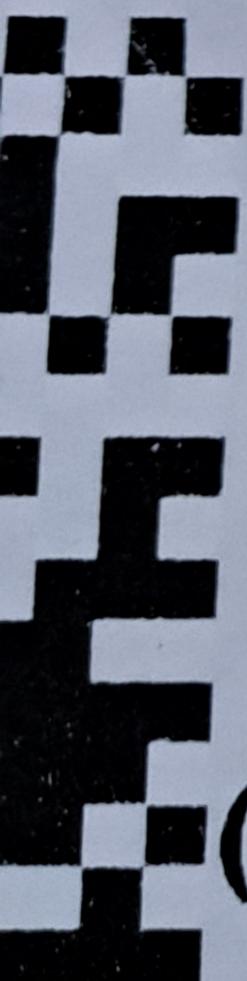

Customer
LJUN01
 Order/ Batch Nr.

Machine Nr. IPK
 25.02.2026 00:00

Store
RG1
 Operator
 misli sc



PEFC Certified

This product is from sustainably managed forests, recycled and controlled sources

PEFC

PEFC /12-31-004 www.pefc.org

(00)347520119030182510

Customer article
EX 439511127001197

Customer Information



00347520119030182510